


PRODUCT MANUAL

ASSEMBLY, INSTALLATION, AND OPERATION INSTRUCTIONS

Maximum load weight limit is 40 lbs per bicycle. Rack empty weight is 15 lbs.
For 1.25in & 2in Hitch Receivers

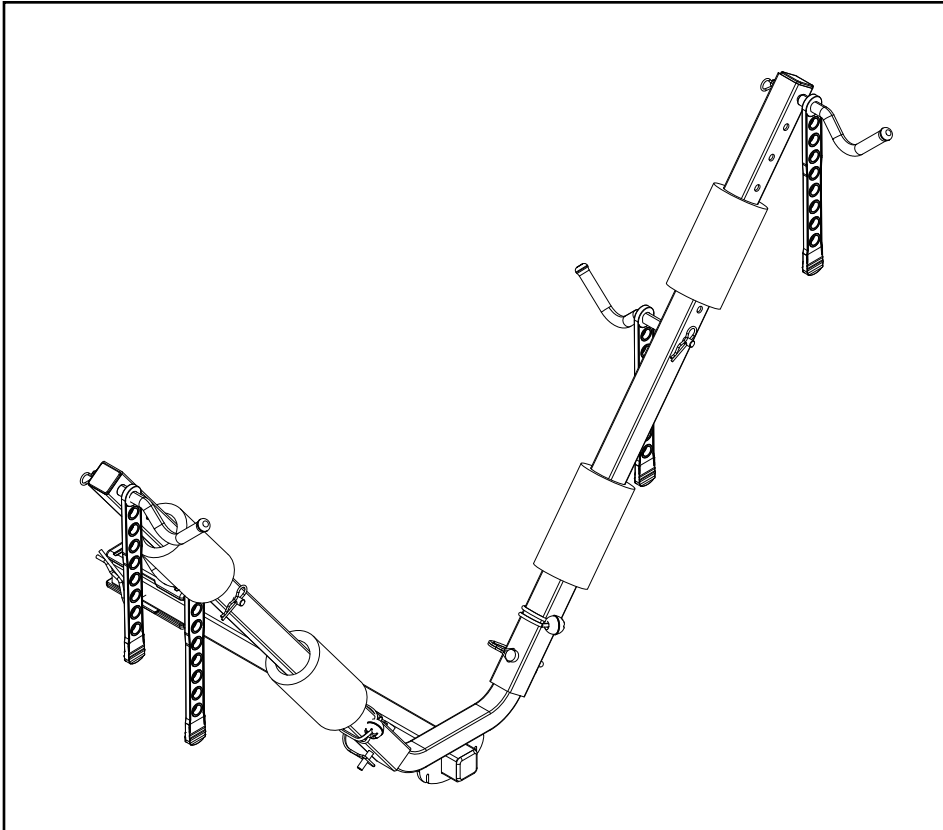

PARTS

QTY. DESCRIPTION

A	1	SHANK
B	1	2IN HITCH ADAPTER
C	2	6MM SOCKET HEAD BOLT
D	1	NOMOTION™ HITCH PIN
E	1	LOCK WASHER
F	1	FLAT WASHER
G	1	LARGE RETAINER CLIP
H	4	WHEEL CRADLE
J	4	RUBBER STRAP
K	2	WING SUPPORT ARMS
L	4	SMALL RETAINER CLIP
M	2	WIRE LOCK PIN
N	4	TOGGLE STRAP
	1	HEX TOOL

To register your product, visit the [LetsGoAero.com/registration](https://www.LetsGoAero.com/registration)

For More Information & Accessories, Visit our Website - www.LetsGoAero.com
For Technical Support & Product Questions Contact Us at 877-464-2376 or 719- 630-3800
Email: support@LetsGoAero.com

Let's Go Aero, Inc. 4474 Barnes Road Colorado Springs, CO 80917, USA

Patent and trademark protected. Patent Number 8,889,456; Patents Pending.


NOTICE: All Manual information is subject to change without notice. Revised editions will be available for free download at [LetsGoAero.com](https://www.LetsGoAero.com). Manual information is considered factual until made obsolete by a revised version.

Follow this QR-Code or visit [LetsGoAero.com/manuals](https://www.LetsGoAero.com/manuals) to check for an updated version:




INSTALLATION FOR 2IN HITCHES

For vehicles with 2in hitches, slide the Shank [A] into the hitch receiver and align the pin holes. [Fig. 1]

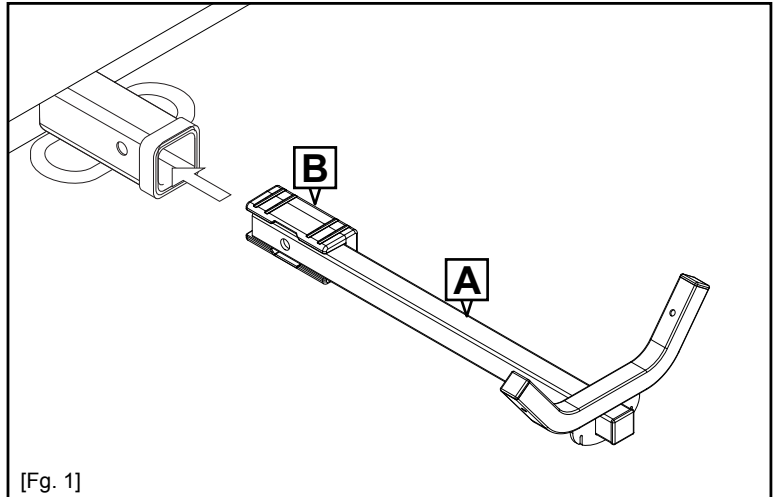


INSTALLATION FOR 1.25IN HITCHES

For vehicles with 1.25in hitches, unbolt the two 6mm Socket Head Bolts [C] connecting the factory installed Hitch Adapter [B] to the Shank [A] using the Hex Tool provided and remove. [Fig. 2]

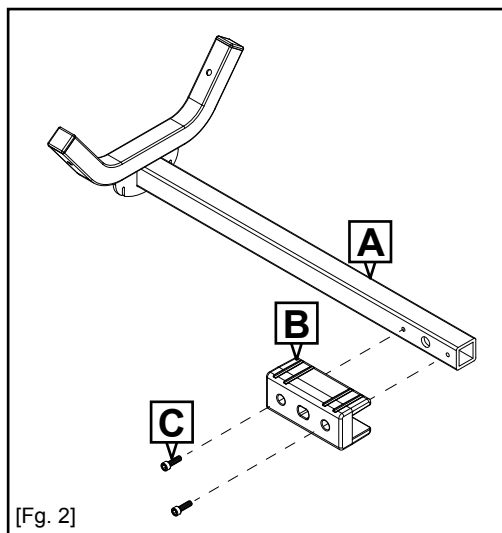

Slide the 1.25in Shank [A] into the Hitch Receiver and align the pin holes. [Fig. 3]

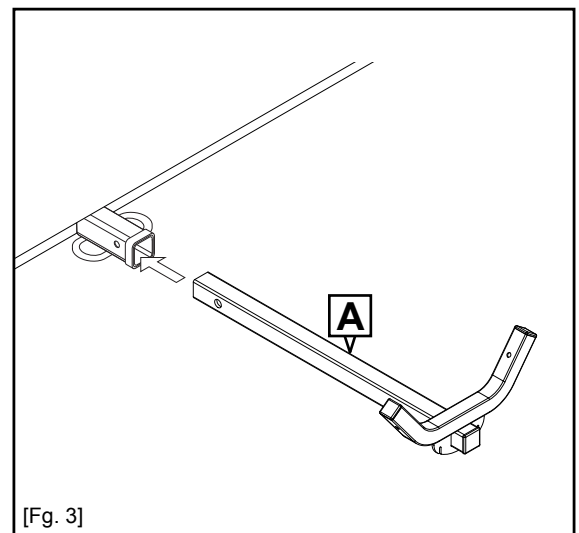

INSTALLATION


RECOMMENDED TOOL: 3/4" WRENCH

Slide the Lock Washer [E] and Flat Washer [F] onto the NoMotion Pin [D] with the Lock Washer positioned closest to the hex head of the NoMotion Pin.

With the pin holes of the Shank [A] and hitch receiver aligned, insert the NoMotion Pin [D] with the attached Washers [E & F] into the vehicle hitch receiver and tighten with 3/4" wrench.

Secure the NoMotion Pin [D] with the Large Retainer Clip [G]. [Fig. 4]

NOTE: For vehicles with 2in Hitch Receivers, the NoMotion Pin must be inserted from the side of the Shank [A] where the Hitch Adapter [B] is the thickest.


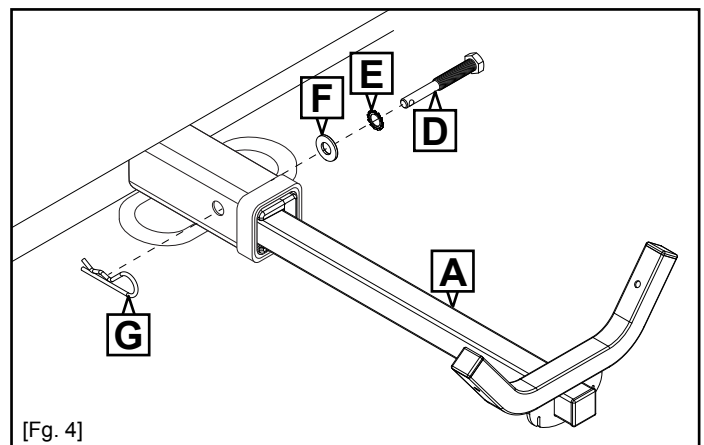


STEP 1: ASSEMBLY

Slide the Foam Bumpers located on each Wing [K] to the center of the Wing to reveal the holes at each end.

Install one Wing [K] onto each side of the Shank uprights. Secure with Wire Lock Pin [M]. [Fig. 5 & 6]


NOTE: The Wire Lock Pin [M] **MUST** always be inserted through the hole in the Shank [A] from above/inside the Shank upright as shown.

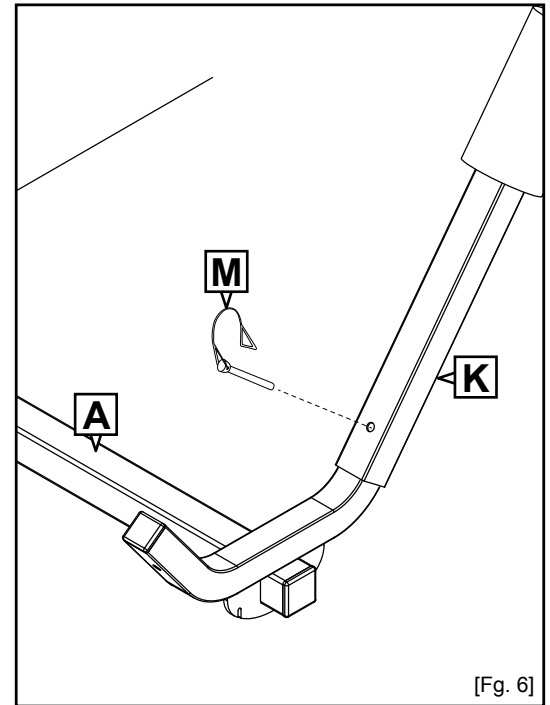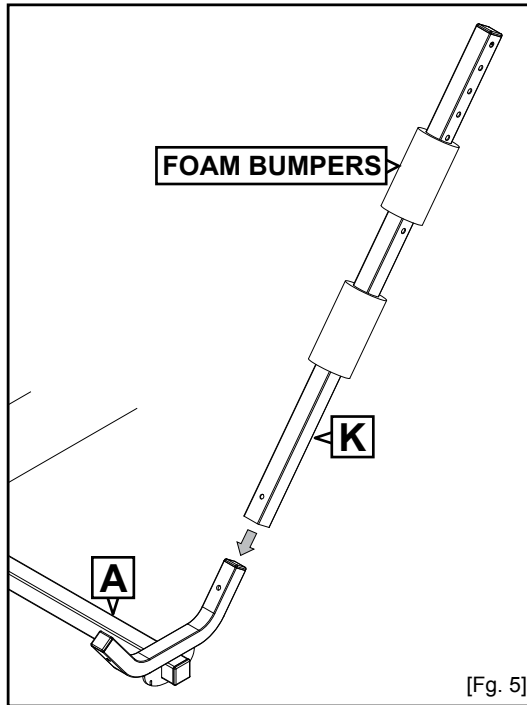

STEP 2: ASSEMBLY

Slide the round end of one (1) Rubber Strap [J] onto each Wheel Cradle [H]. [Fig. 7]


NOTE: Be sure to slide the Rubber Straps [J] all the way onto the cradles so that it tightly rests over the plastic coating of the Wheel Cradle [H].

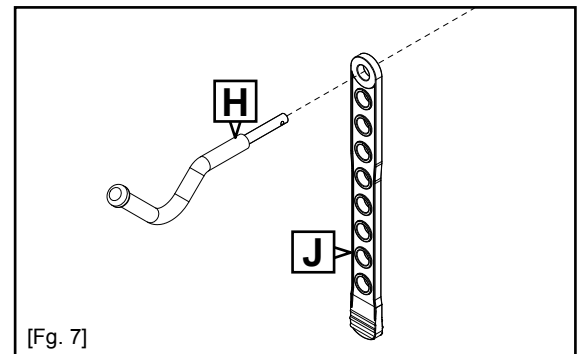

STEP 3: ASSEMBLY

Insert two (2) Wheel Cradles [H] with Rubber Straps [J] facing in opposite directions into the Wing [K] as shown. [Fig. 8]

Secure each Wheel Cradle [H] with a Retainer Clip [L].

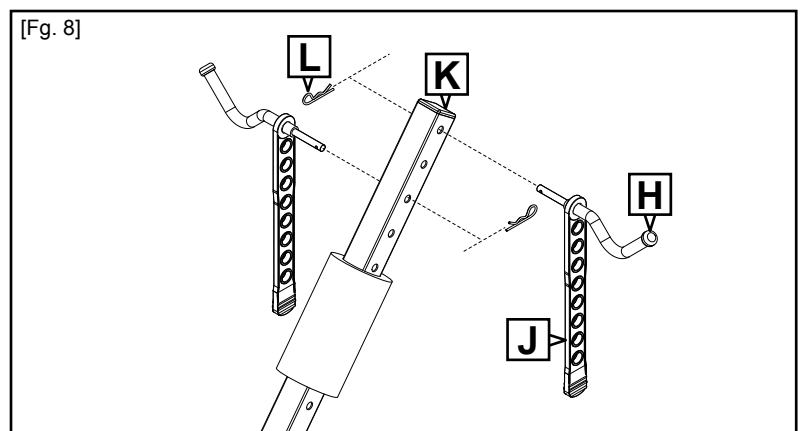


OPERATION: BICYCLE MOUNTING

Hang bicycles by the tires on the Wheel Cradles [H] with the chain rings to the outside. [Fig. 9 & 10]


Adjust the Foam Bumpers located on the Wings [K] to protect the frame of the bicycle.

IMPORTANT: For two bicycles, position the bicycles facing in opposite directions (front-to-back/back-to-front) with the chain ring to the outside.

Some adjustment of the Wheel Cradles may be necessary in order to accommodate both bicycles.

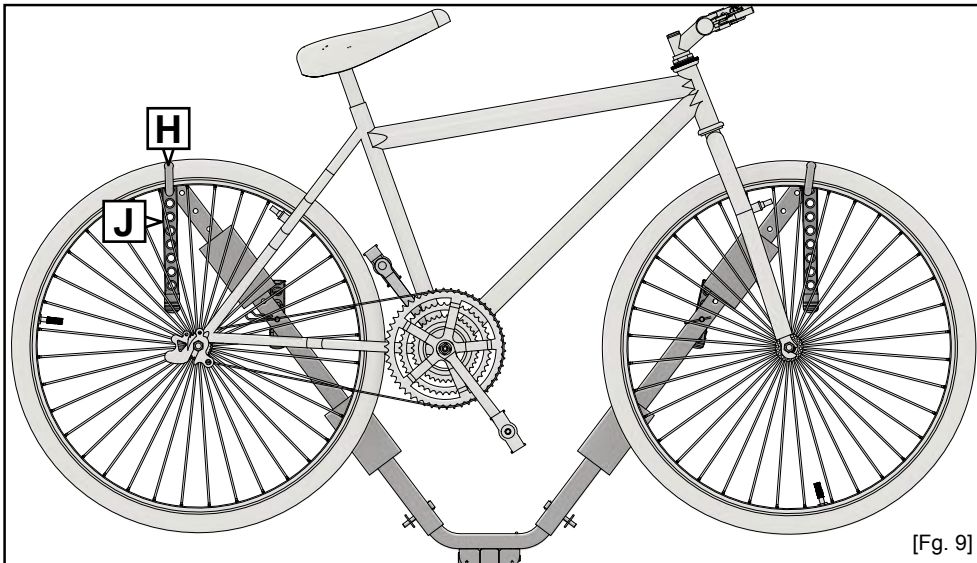


[Fig. 9]

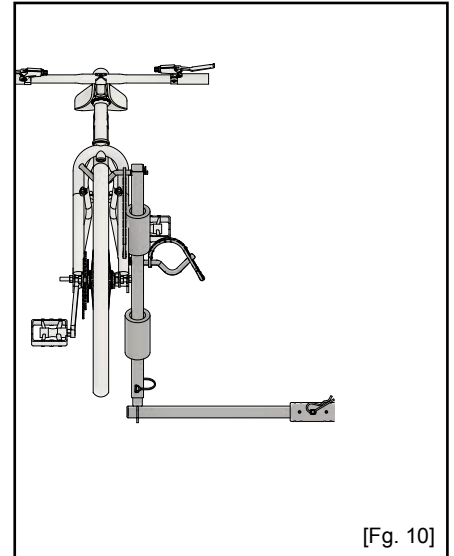

[Fig. 10]

Secure by tensioning each Rubber Strap [Y] over the top of each tire and engaging a strap hole over the end of the Upper Wheel Cradle [W] using the tightest hole available. [Fig. 25 & 26]

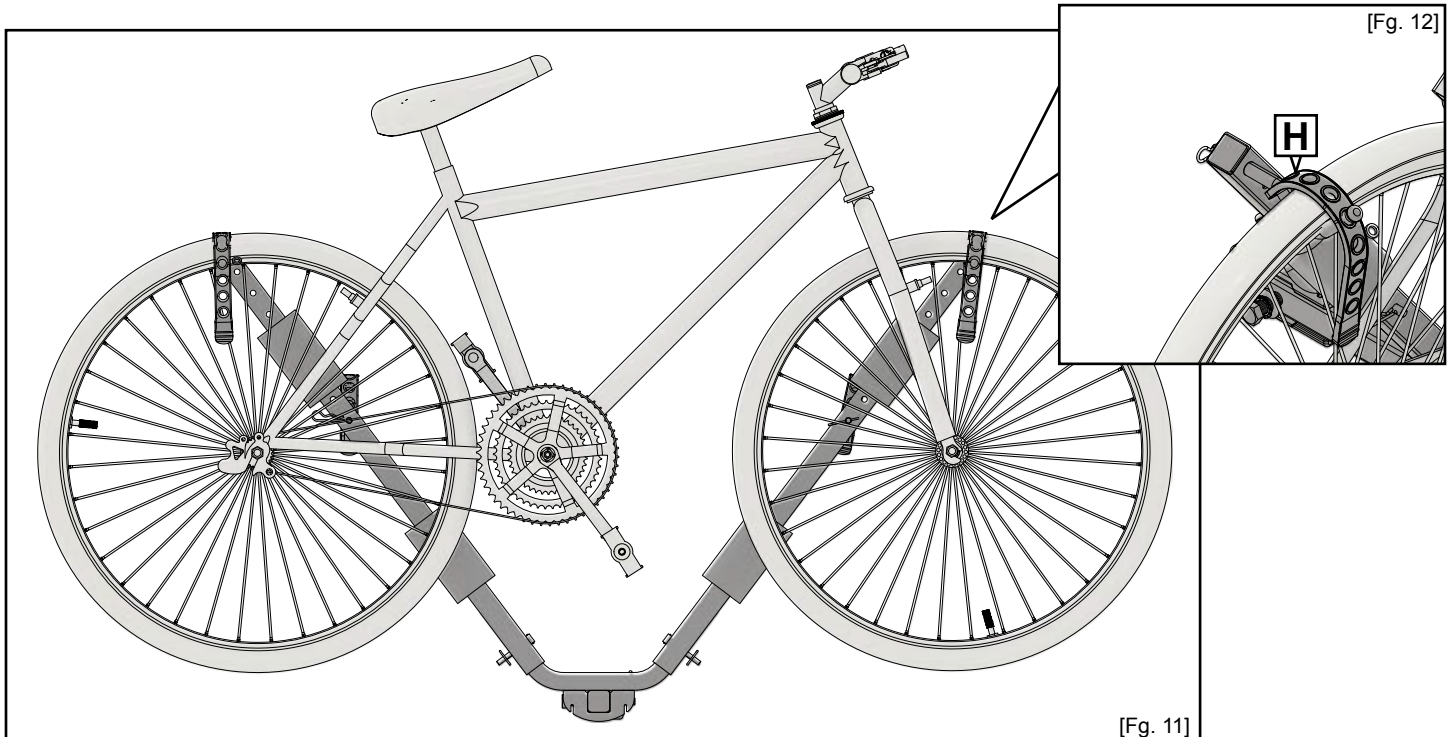


[Fig. 12]

[Fig. 11]

FOR PASSENGER VEHICLE/ MOTORIZED RV USE ONLY:

Continue securing the bike by wrapping the looped end of one (1) Toggle Strap [N] around the outside bike peddle. Pull the bike down and inward against the Foam Pads and then tightly secure the cord to one of the available notches on the base of the Shank [A] using the tightest available toggle ball.


NOTE: Secure loose cord or toggle balls by wrapping excess cord around the base of the Shank [A] and to the Toggle Cord itself by wrapping under or through Toggle Strap [N].

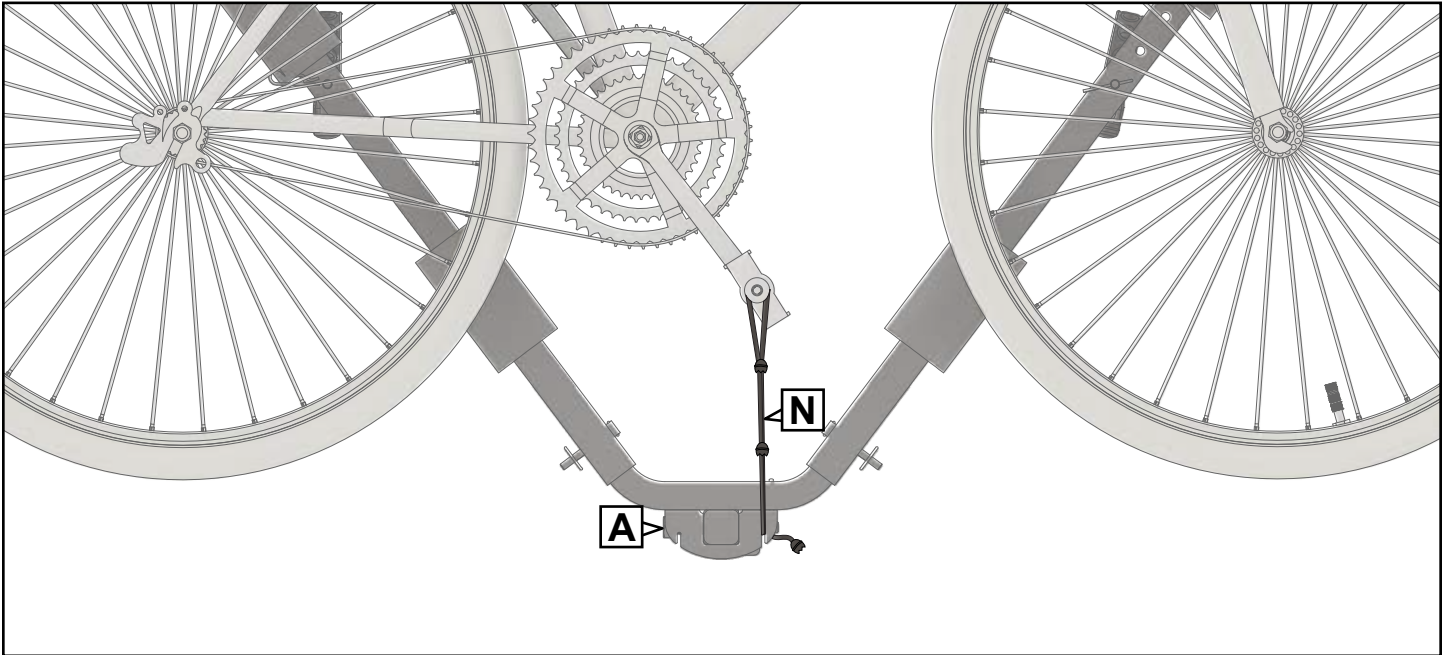

FOR OFF ROAD USE:

Wrap one Toggle Strap [N] around the Wing [K] and front fork tubing of the bike, using one Foam Bumper between the fork and the Wing. Loop the Toggle Strap on itself and secure the Toggle Strap in place by looping one or more of the toggle balls under the tensioned cord.

Wrap one Toggle Strap [N] around the seat stay tubing on the rear of the bike as shown. Position one Foam Bumper between the seat stay and the Wing [K] then loop the Toggle Strap around the seat stay, the Wing and the Foam Bumper. Tension the Toggle Strap securely, and loop the toggle ball under the cord to fix the connection.

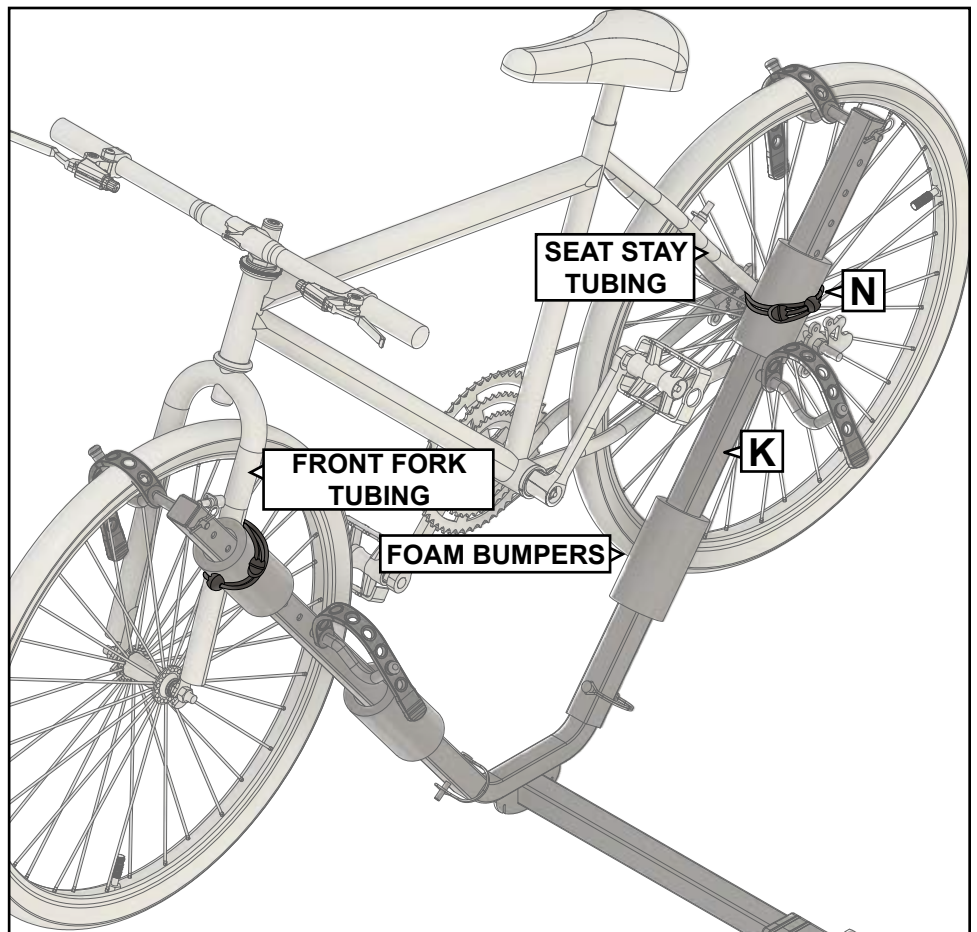

▲ WARNING:

ALWAYS SECURE BICYCLES USING TWO TOGGLE STRAPS [N] PER BICYCLE AS SHOWN FOR OFF-ROAD USE.

OPERATION GUIDELINES

Keep bicycles away from hot exhaust.

Drive conservatively, especially over bumps.

Bicycles should never extend beyond sides of vehicle.

Approved for passenger vehicles including motorized RV only, not warranted for trailer use including RV travel trailer and 5th Wheels

For use on receiver styler hitch only; not warranted for bolt-on bumper style mount or any other variation.

For best weight distribution, always load heaviest bicycles closest to vehicle hitch and lightest bicycles farther away.

Do not use Let's Go Aero carriers and accessories for purposes other than which they were designed.

MAXIMUM WEIGHT CAPACITY LIMIT

The maximum load weight per bicycle is 40 lbs. Do not exceed this weight per bicycle. Failure to follow this guideline will void the warranty.

⚠ WARNING:

The maximum overall weight limit is 40 lbs per bicycle plus the empty weight of the rack. This limit is always subordinate to the maximum load recommended by the manufacturer of the vehicle itself. It is always the lower maximum recommended load that applies. Do not exceed the load weight limit of the rack or the manufacturer's vehicle receiver hitch tongue weight rating. Consult your vehicle manual for your receiver hitch tongue weight rating. Failure to follow these guidelines or the product's instructions will void the warranty.

⚠ WARNING:

Make sure the NoMotion hitch pin is properly secured by tightening firmly with a wrench. Always check that all bolts and connections are tight and fully secure. Make sure the bicycles are securely attached to the bicycle rack using all required straps provided. Make sure additional care is taken for securing bicycles to rack for motorized RV and off-road use as instructed. Failure to follow proper installation and equipment checks before transit may result in damage to carrier, proper, bodily injury, or death.

⚠ CAUTION:

Car vehicle exhaust can cause a hazard. As a precaution, position bicycles clear of exhaust.