# INSTALLATION INSTRUCTIONS

## Folding Cargo Caddy

**CC-101**



### *WARNING*

- **Read, understand and follow all warnings and instructions before assembly and use.**
- **Not intended to be used for any motorized vehicle.**
- **Never exceed the maximum weight capacity of 500 lbs. on this Cargo Caddy.**
- **This Cargo Caddy is only to be used on properly installed 2-inch Class III hitch receiver capable of supporting the Cargo Caddy and its load. Refer to the hitch manufacturer's specifications and load capacities before using.**
- **This Cargo Caddy is not intended for transport of people or live animals.**
- **Never attempt to modify the Cargo Caddy in any way.**
- **Never use the Cargo Caddy for a purpose which it was not intended.**
- **Never carry loads wider or deeper than the Cargo Caddy.**
- **Never carry flammable items on the Cargo Caddy.**
- **Never allow exhaust fumes to blow directly on any items. This is a FIRE HAZARD.**
- **Never obscure vehicle tail lights with cargo on the Cargo Caddy.**
- **Carefully inspect the Cargo Caddy before each use for missing, damaged or loose parts or hardware. Tighten, repair and/or replace hardware and parts as needed to ensure safe operation.**
- **Always ensure weight is evenly distributed and cargo is completely secured to Cargo Caddy and will not shift during transport. Bungee cords are NOT recommended for securing loads because they can stretch and/or snap allowing loads to come loose.**
- **Stromberg Carlson is not responsible for any damage if warnings are not heeded.**

## Folding Cargo Caddy

**The hitch mounted back porch you've always wanted.**




### Contents

| Item# | Description | Quantity |
|---|---|---|
| 1 | Platform | (2) |
| 2 | M10x20 Carriage Bolts | (12) |
| 3 | Flat Brace | (1) |
| 4 | M10x75 Carriage Bolt | (2) |
| 5 | M10 Locknut | (14) |
| 6 | 2" Shank | (1) |
| 7 | Support Bridge | (2) |
| 8 | M16×80 Hexagon Head Bolt | (1) |
| 9 | Foldable Connection Bar | (1) |
| 10 | Clip | (1) |
| 11 | 5/8" Pin | (1) |
| 12 | M16 Locknut | (1) |
| 13 | Connecting Plate | (2) |

**(NOTE: CLEVIS PIN AND RECEIVER HITCH NOT INCLUDED)**

### Tools Required

(1) Open wrench 17mm
(1) Open wrench 24mm
(1) Adjustable wrench 0-30mm

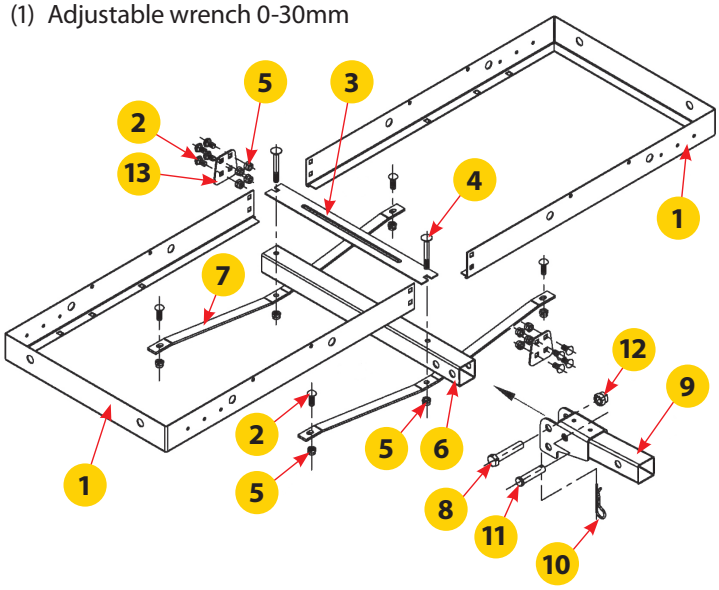


INS-CC101-C 07.01.2026

## Assembly Instructions

1. Align platform angle side holes (upper 2 holes), connect the platform (1), and connecting plate (13), together with M10x20 carriage bolt (2), and M10 locknut (5), **(80% tightness)**. (See **Figure 1**)

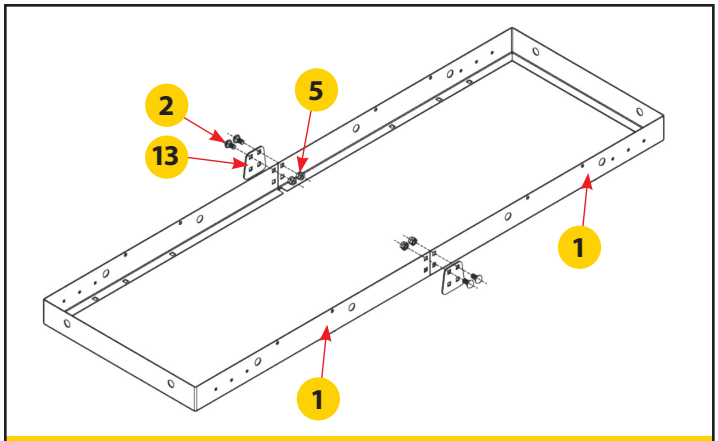



**FIGURE 1**

2. Put 2" shank (6), under the middle of platform (1), place support bridge (7), under 2" shank (6). Place flat brace (3), in the middle top of platform (1). Connect by M10x75 carriage bolt (4), M10 locknut (5), align the holes, Secure with M10x20 carriage bolts (2), M10 locknut (5), **(80% tightness)**. (See **Figure 2**)

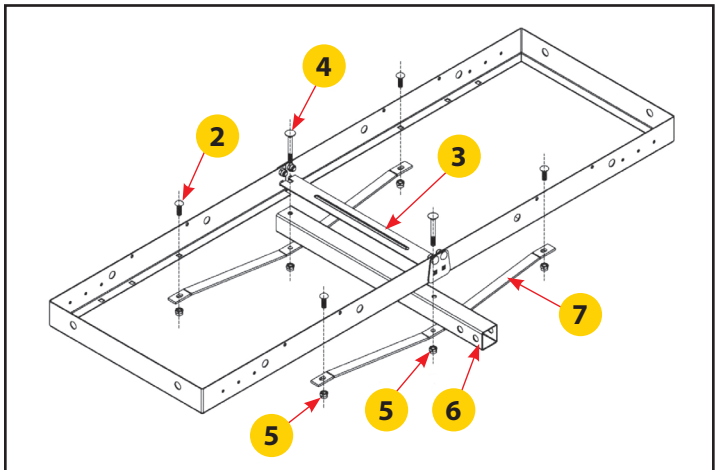



**FIGURE 2**

3. Align platform angle side holes (the lower 2 holes), connect platform (1), and connecting plate (13), with M10x20 carriage bolt (2), M10 locknut (5), **(80% tightness)**. (See **Figure 3**)

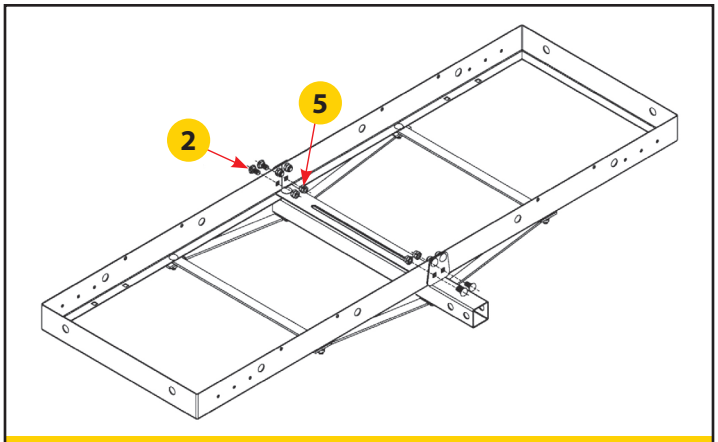



**FIGURE 3**

4. Insert 2" shank (6), into the foldable connection bar (9), align all the holes and lock large holes with M16x80 hexagon head bolt (8), and M16 locknut (12). 5/8" Pin (11), is needed for horizontal rotation and rotating 90 degrees, insert clip (10), securely into the hole in 5/8" Pin (11), to secure it in place. (See **Figure 4**)

5. Now ensure **ALL** bolts and locknuts are completely and securely tightened.

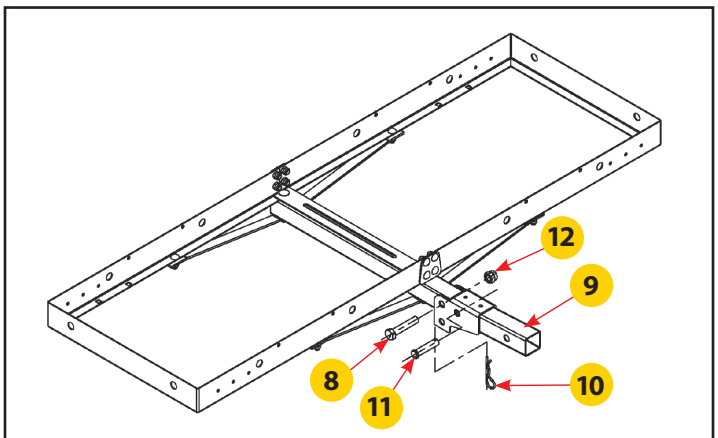



**FIGURE 4**

**⚠WARNING**
This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

STROMBERG
STROMBERG CARLSON
STROMBERG CARLSON PRODUCTS INC.
STROMBERG STRONG
SINCE 1959